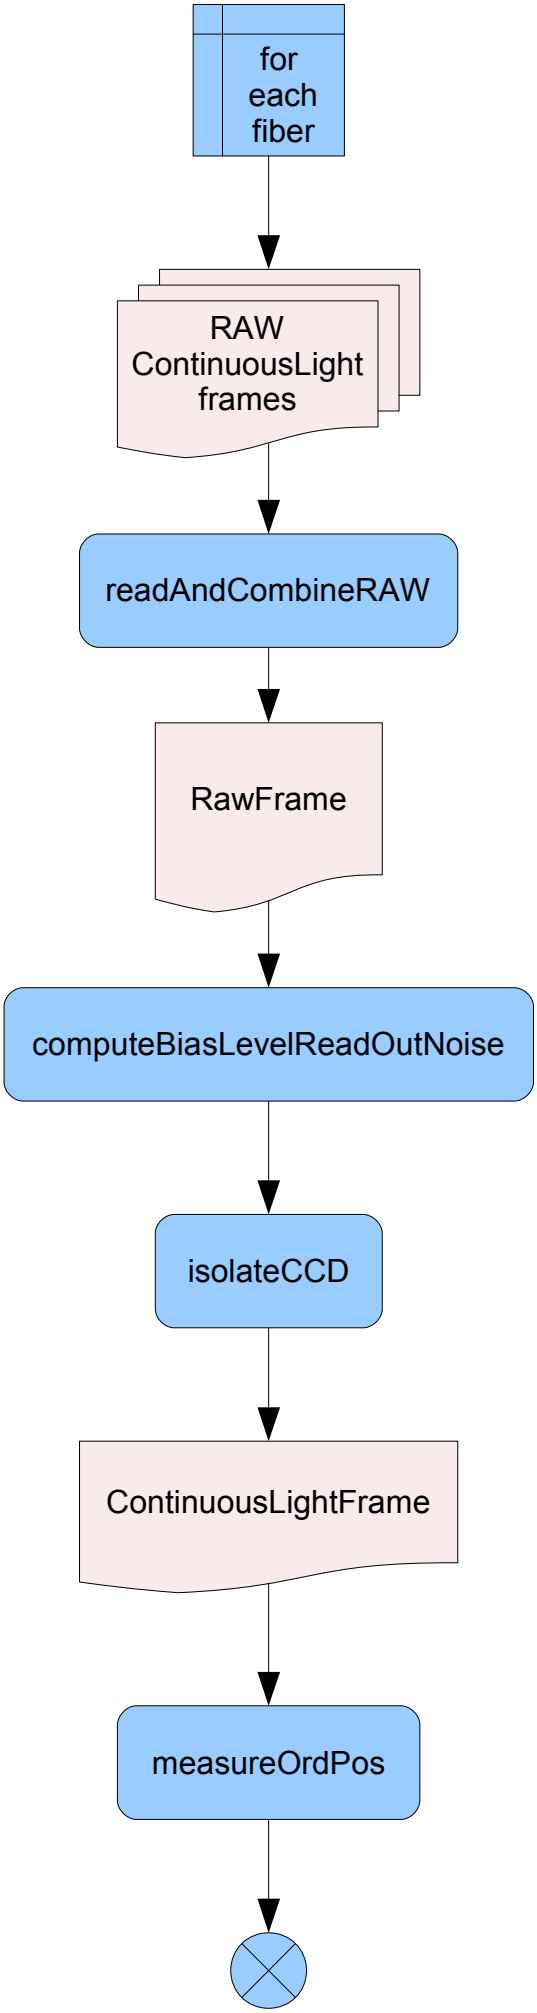
for each fiber
RAW ContinuousLight frames
readAndCombineRAW
RawFrame
computeBiasLevelReadOutNoise
isolateCCD
ContinuousLightFrame
measureOrdPos

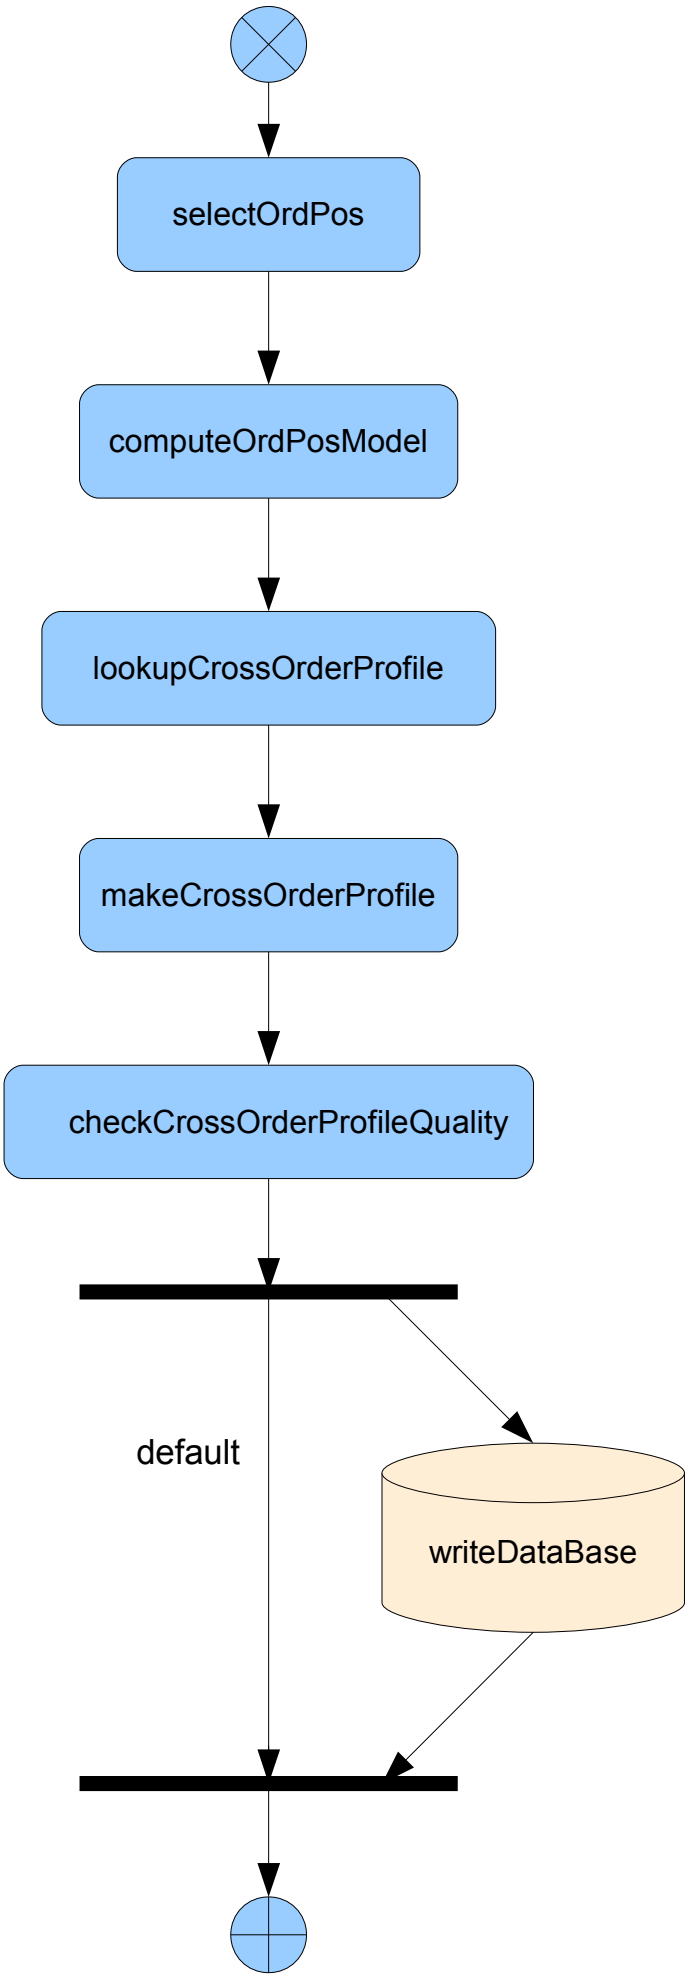
selectOrdPos
computeOrdPosModel
lookupCrossOrderProfile
makeCrossOrderProfile
checkCrossOrderProfileQuality
default
writeDataBase